






功能：模具冷卻
FUNCTION : MOLD COOLING

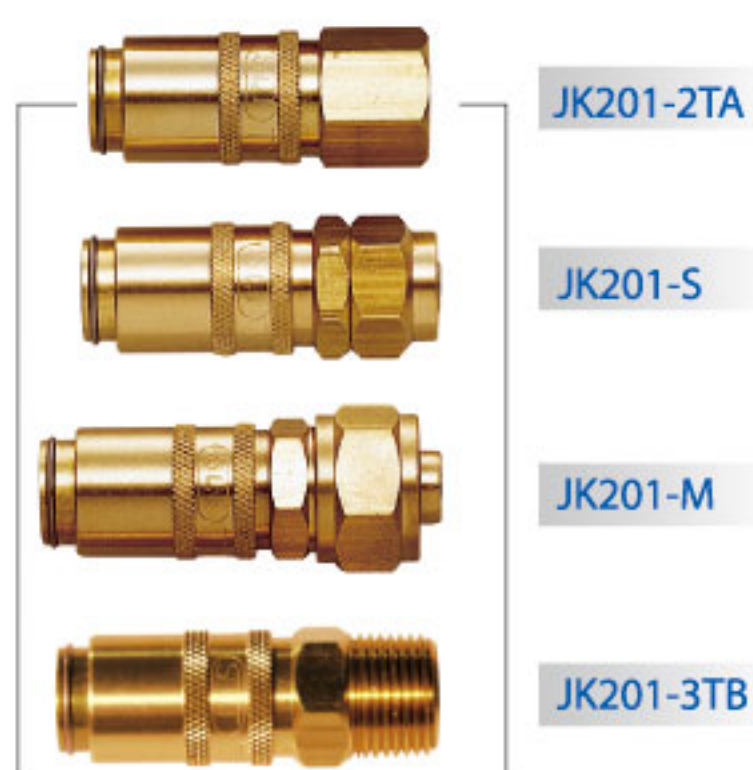

功能：模具冷卻
FUNCTION : MOLD COOLING

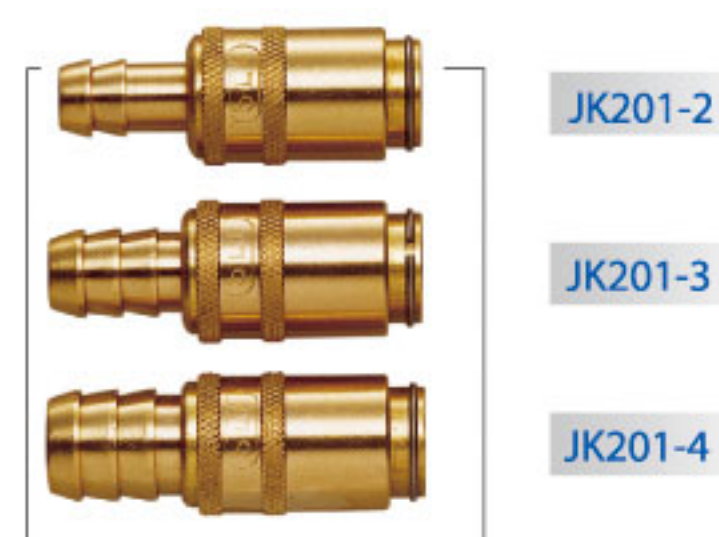


功能：模具冷卻
FUNCTION : MOLD COOLING


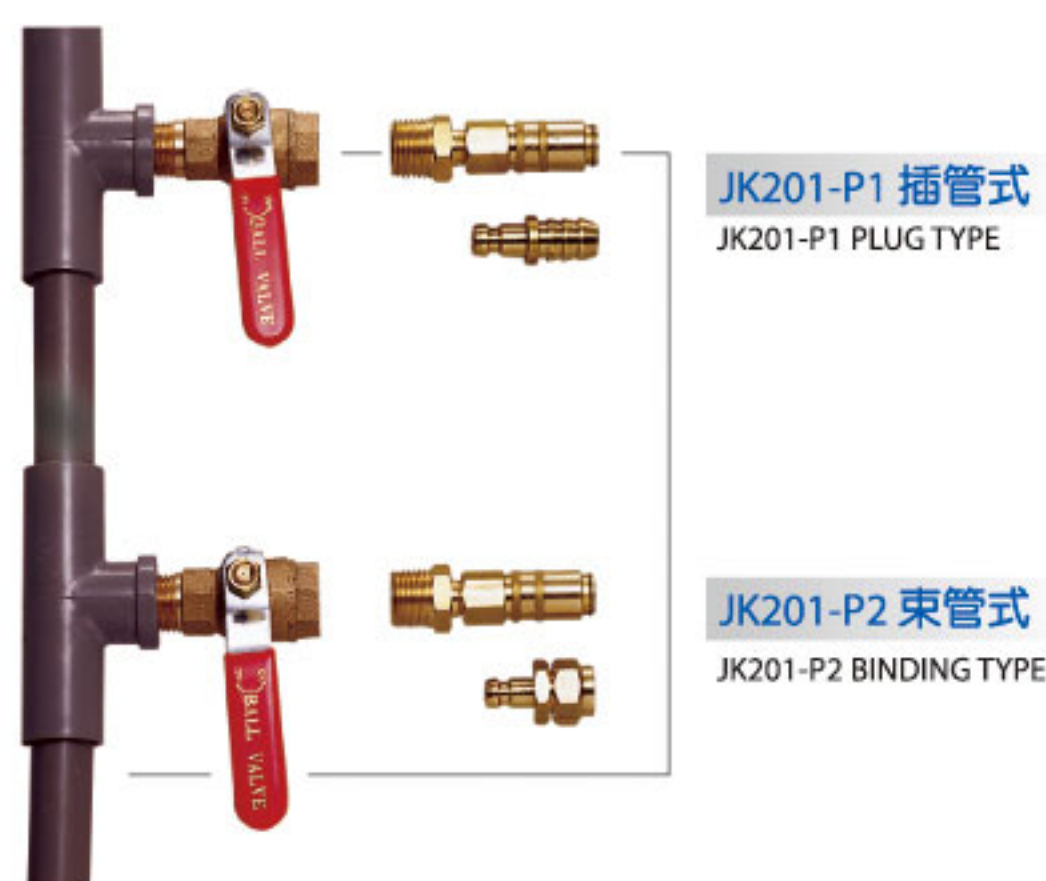


功能：模具源頭供水
FUNCTION : MOLD SOURCE WATER SUPPLY



功能：耐高溫、油、蒸汽，保證耐溫180℃
安全耐用
FUNCTION : HIGH TEMPERATURE,OIL,
STEAM RESISTANCE,GUARANTEED
SAFETY AND DURABLE180℃

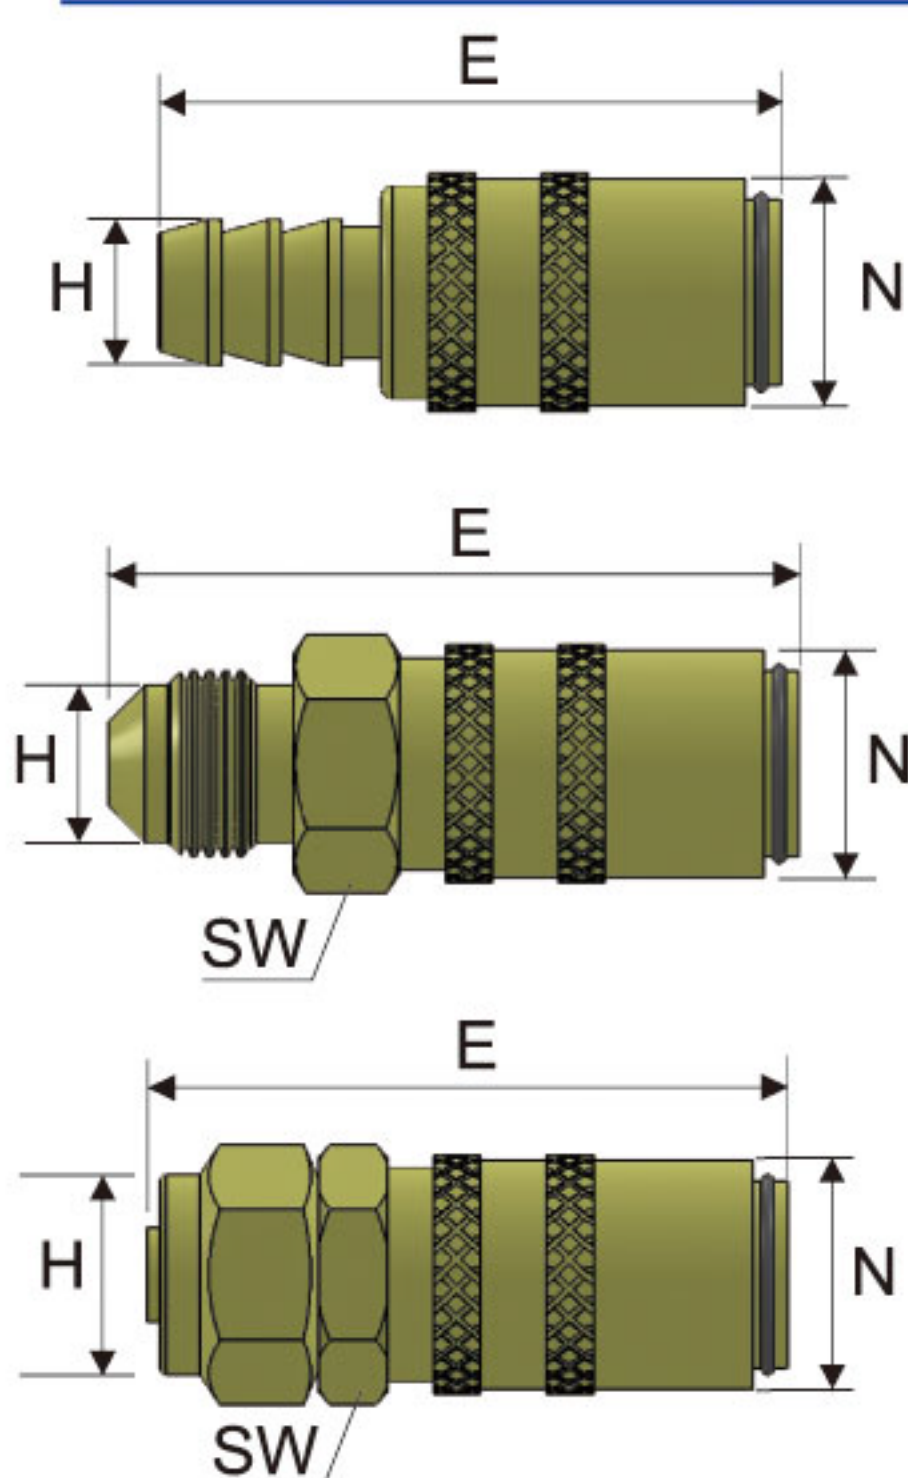

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL	
JK201-2	47	18		5/16" 塑膠軟管 (Hose)	銅 BRASS	
JK201-3	47			3/8" 塑膠軟管 (Hose)		
JK201-4	47			1/2" 塑膠軟管 (Hose)		
JK201-2TA	46		17H	1/4"PT 內牙 (Female thread)		
JK201-2TB	50			1/4"PT 外牙 (Male thread)		
JK201-3TB	50			3/8"PT 外牙 (Male thread)		
JK201-S	48.5			φ 6.5 x φ 10 PU 管 (PU tube)		
JK201-S2	53.5			φ 8 x φ 12 PU 管 (PU tube)		
JK201-M	53.5			3/8"x 1/2" PU 管 (PU tube)		
JK201-L2	47			90° L 型 5/16"塑膠軟管 (Hose)		
JK201-L3	47			90° L 型 3/8" 塑膠軟管 (Hose)		
JK201-L4	47			90° L 型 1/2" 塑膠軟管 (Hose)		
JK201-L3F	47			90° L 型 3/8" 耐溫膠管 (Hose)		
JK201-FL3H	47			90° L 型 3/8" (喇叭) 9/16-18 37°flared		
JK201-F2H	52			1/4" (喇叭)白鐵紗管 7/16-20 37°flared		
JK201-F3H	53.5			3/8" (喇叭)白鐵紗管 9/16-18 37°flared		
JK201-F4H	56			19H		1/2" 喇叭口接頭 3/4-16 37°flared
JK201-P1	70					外牙 + AX 插心
JK201-P2	70					外牙 + AS 插心
適用流體 Application	空氣、水、油 Gas 、 Water 、 Oil	工作壓力 Working Pressure Max. 10 kg/cm ²		工作溫度 Working Temp. 0~80℃ or 0~180℃		
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : JK201-3-OH		



TY



TK



TE



TH



TD



TF



TR



AS



AM



AX




ALR

可360°旋轉




ALQ

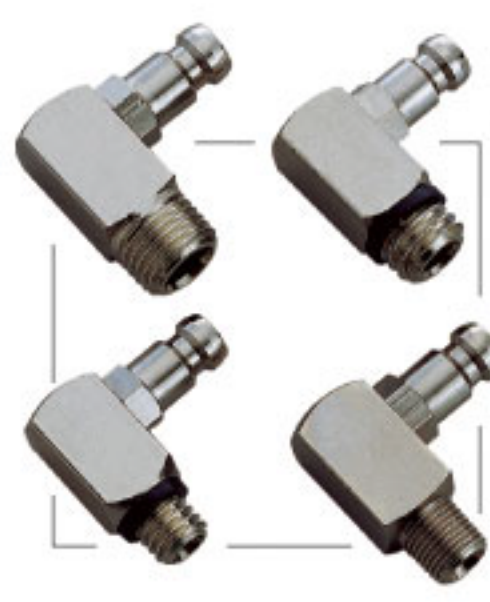


AL



AB

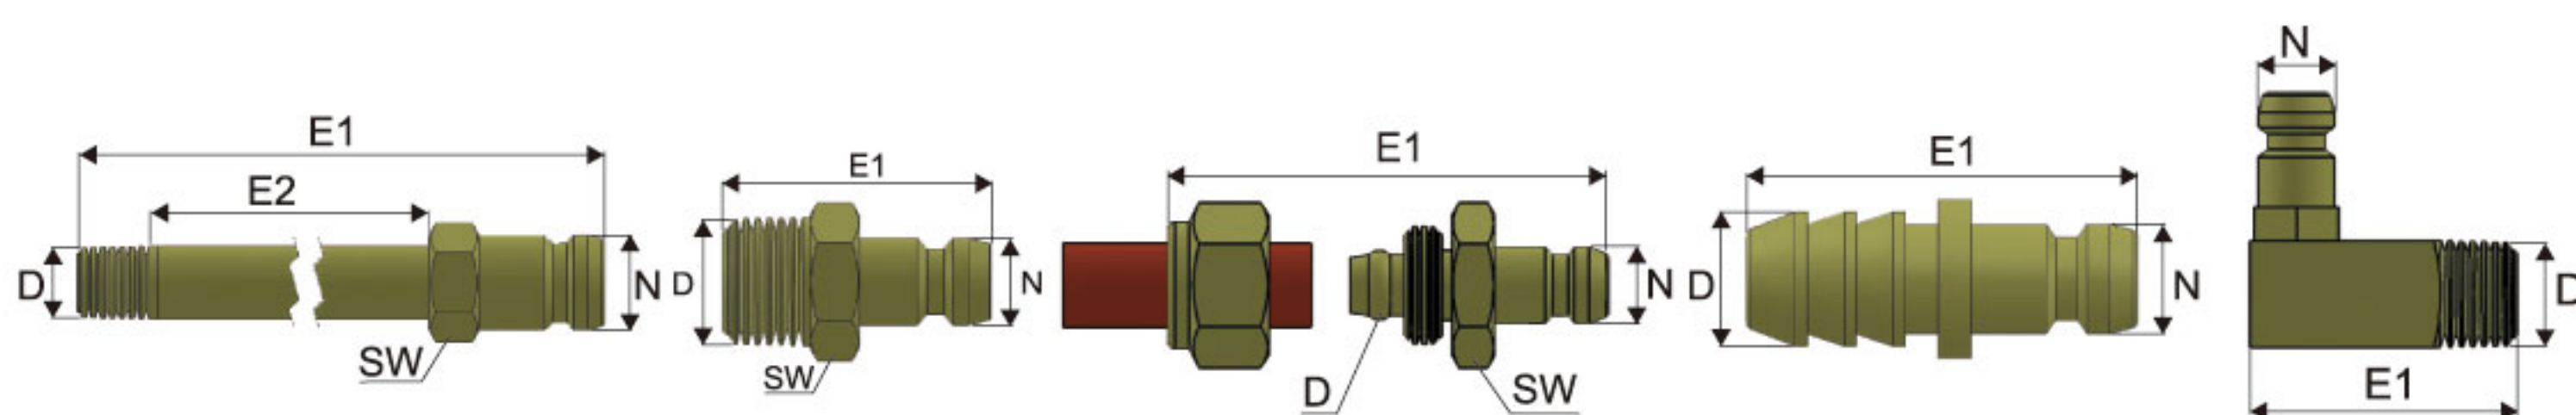

型號 ITEM NO.	E 1(長度) LENGTH (mm)	E 2(長度) LENGTH (mm)	D(管接尺寸) TUBE &THREAD	SW	材質 MATERIAL		
TH	200	170	1/8"PT、W3/8 粗牙 1/4"PT、W1/2 粗牙	10H 14H	銅 BRASS		
TE	160	130					
TK	130	100					
TY	110	80					
TD	90	60					
TF	70	40					
TR	44.5	22					
AB	27.5		1/8"PT、W3/8 粗牙	12H			
	30.5		1/4"PT、W1/2 粗牙	14H			
AL			32	3/8"PT、W5/8 粗牙		17H	
	AX		32	1/8"PT、W3/8 粗牙 1/4"PT、W1/2 粗牙		12.7□	
AS			32	5/16"、3/8"、1/2" 塑膠軟管(HOSE)		17H	
AS2	36		φ 6.5 x φ 10 PU 管 (PU tube)				
AM	36		φ 8 x φ 12 PU 管 (PU tube)				
ALQ	32		3/8"x 1/2" PU 管 (PU tube)	12.7□			
ALR	38.5		1/8"PT、W3/8 粗牙 1/4"PT、W1/2 粗牙				
			1/8PT、W3/8 粗牙 1/4PT、W1/2 粗牙	18□			
★ ALR 為 90° L 型旋轉插心、其結構可 360° 旋轉。						N : φ 9.0	
★ ALR is a 90° L rotate type plug , the structure is allowed to 360° rotation 。							

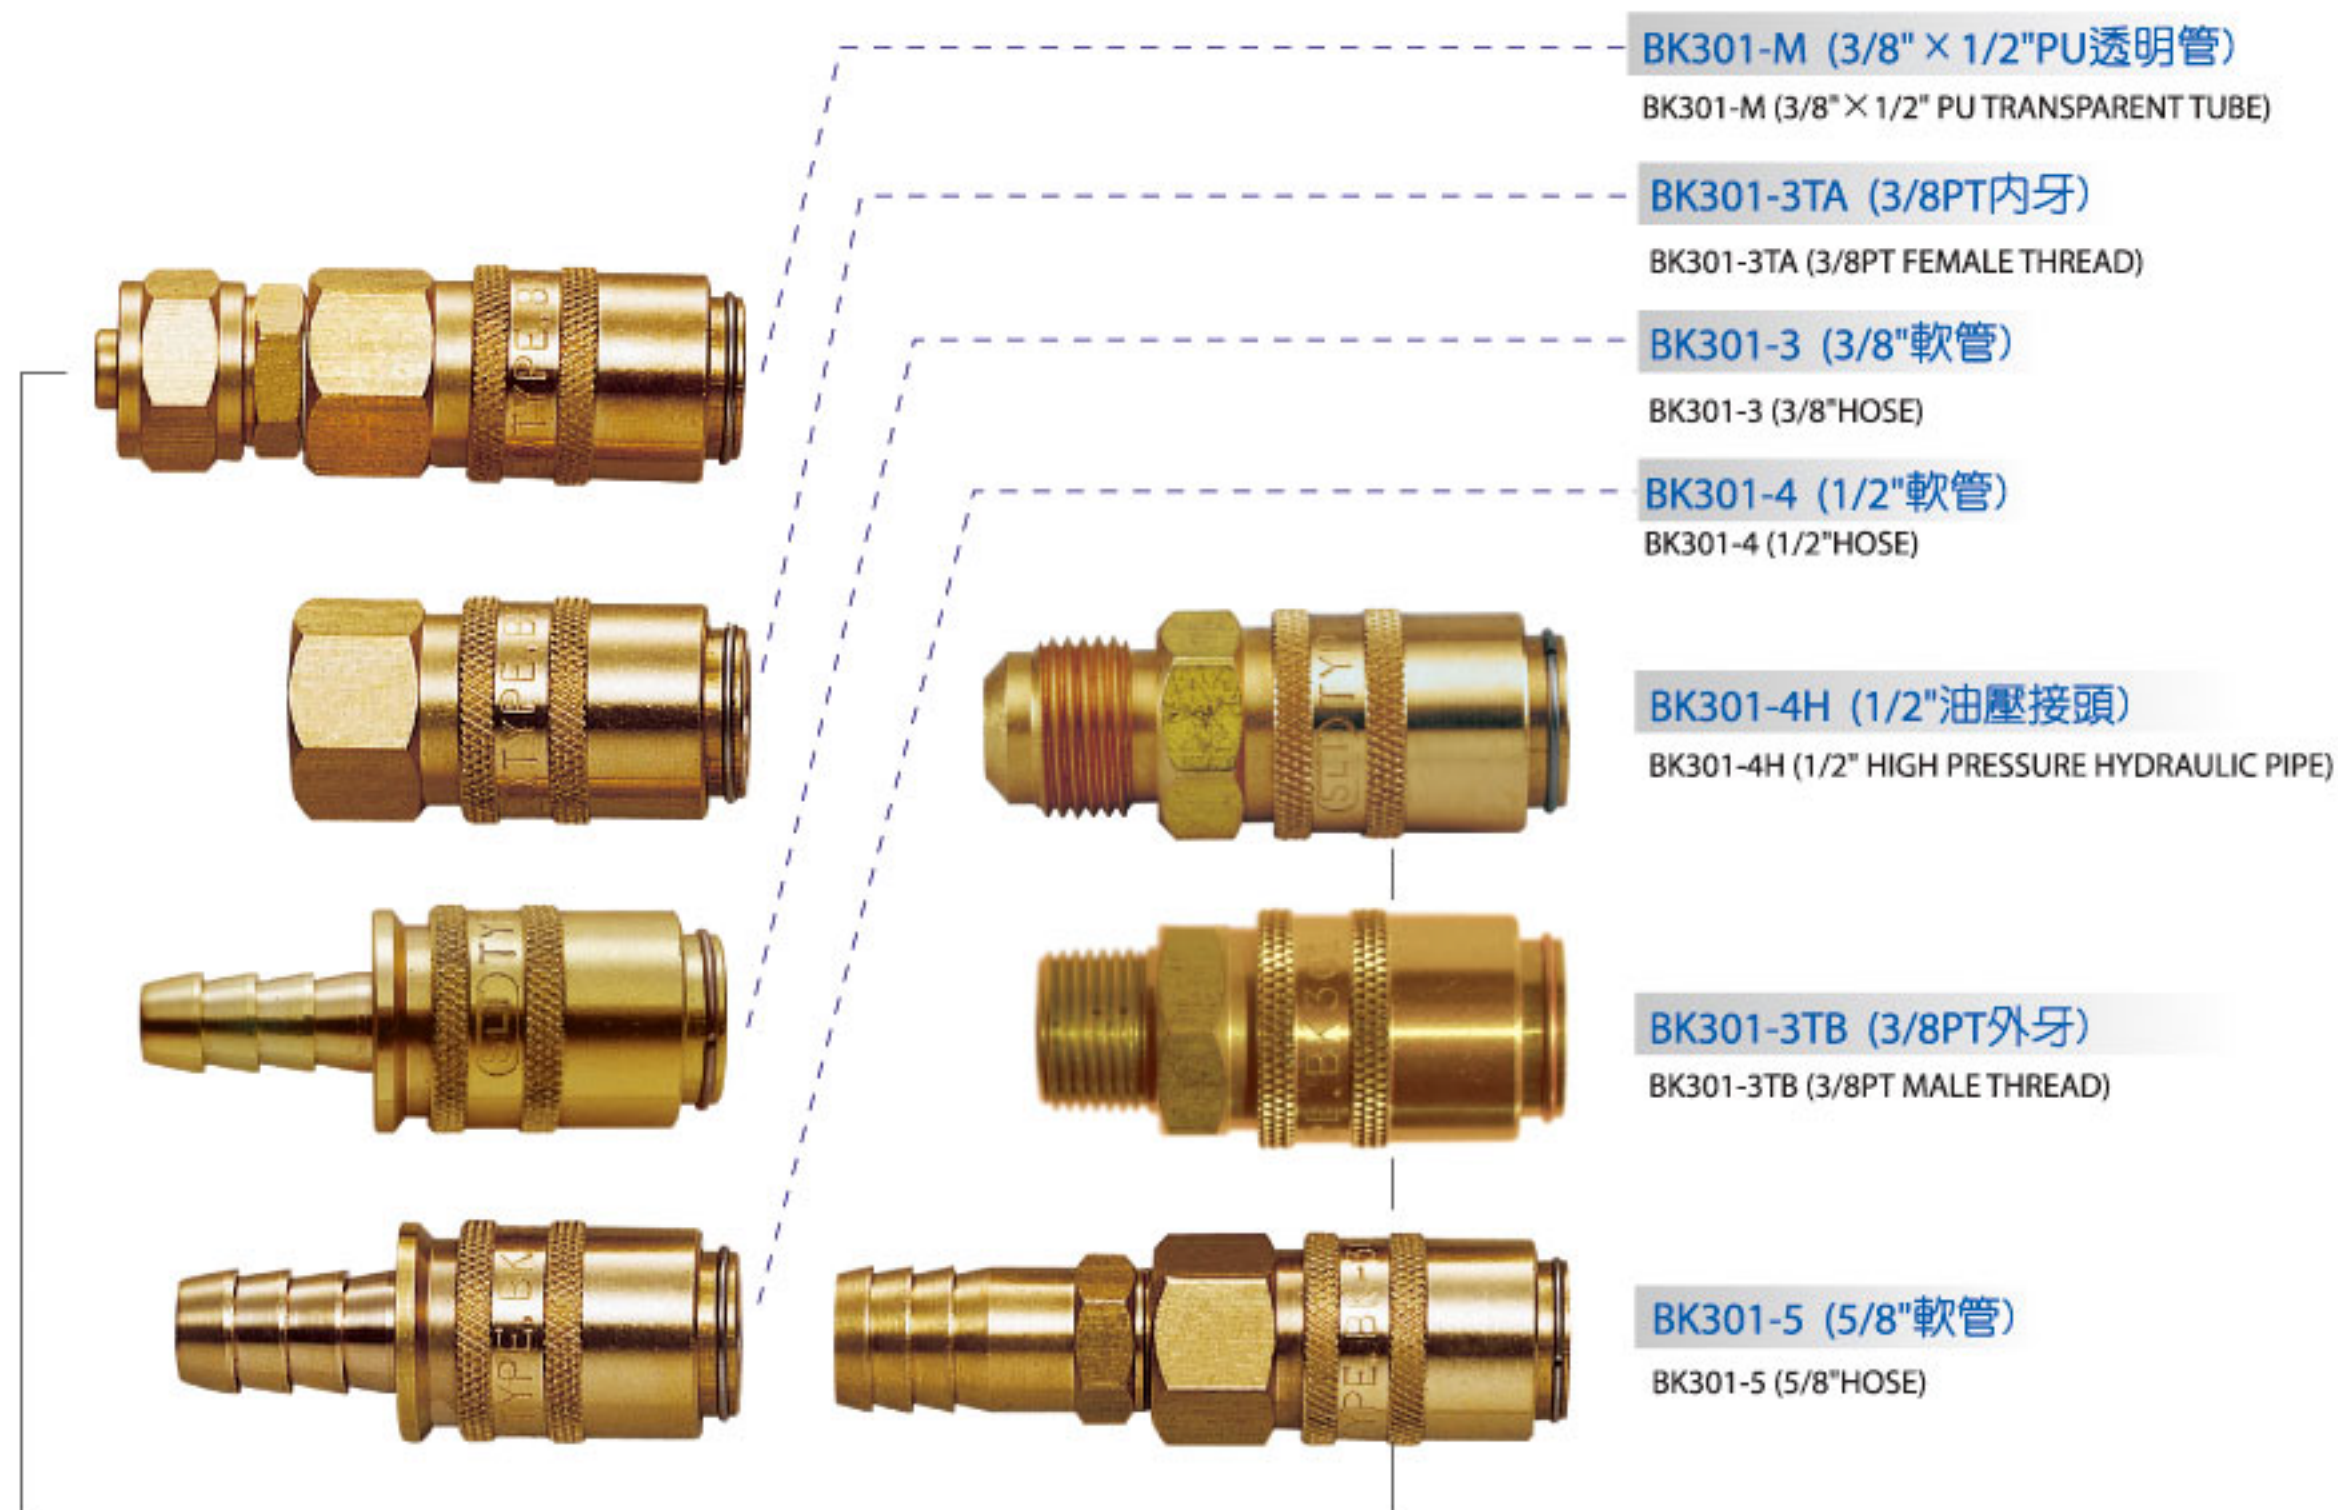

功能：大型模具冷卻
FUNCTION : MOLD COOLING



BK301-L4H (1/2"油壓接頭)
BK301-L4H
(1/2" HIGH PRESSURE HYDRAULIC PIPE)

BK301-L4 (1/2"塑膠軟管)
BK301-L4 (1/2" HOSE)


功能：大型模具冷卻
FUNCTION : MOLD COOLING








BK301-P1 插管式：1/2" x 5/8" (軟管)
BK301-P1 (PLUG TYPE) : 1/2" x 5/8" (HOSE)

BK301-P2 束管式：3/8" × 1/2" (PU透明管)
BK301-P2 BINDING TYPE : 3/8" x 1/2" (PU TRANSPARENT TUBE)

功能：大型模具源頭供水
FUNCTION : MOLD SOURCE WATER SUPPLY

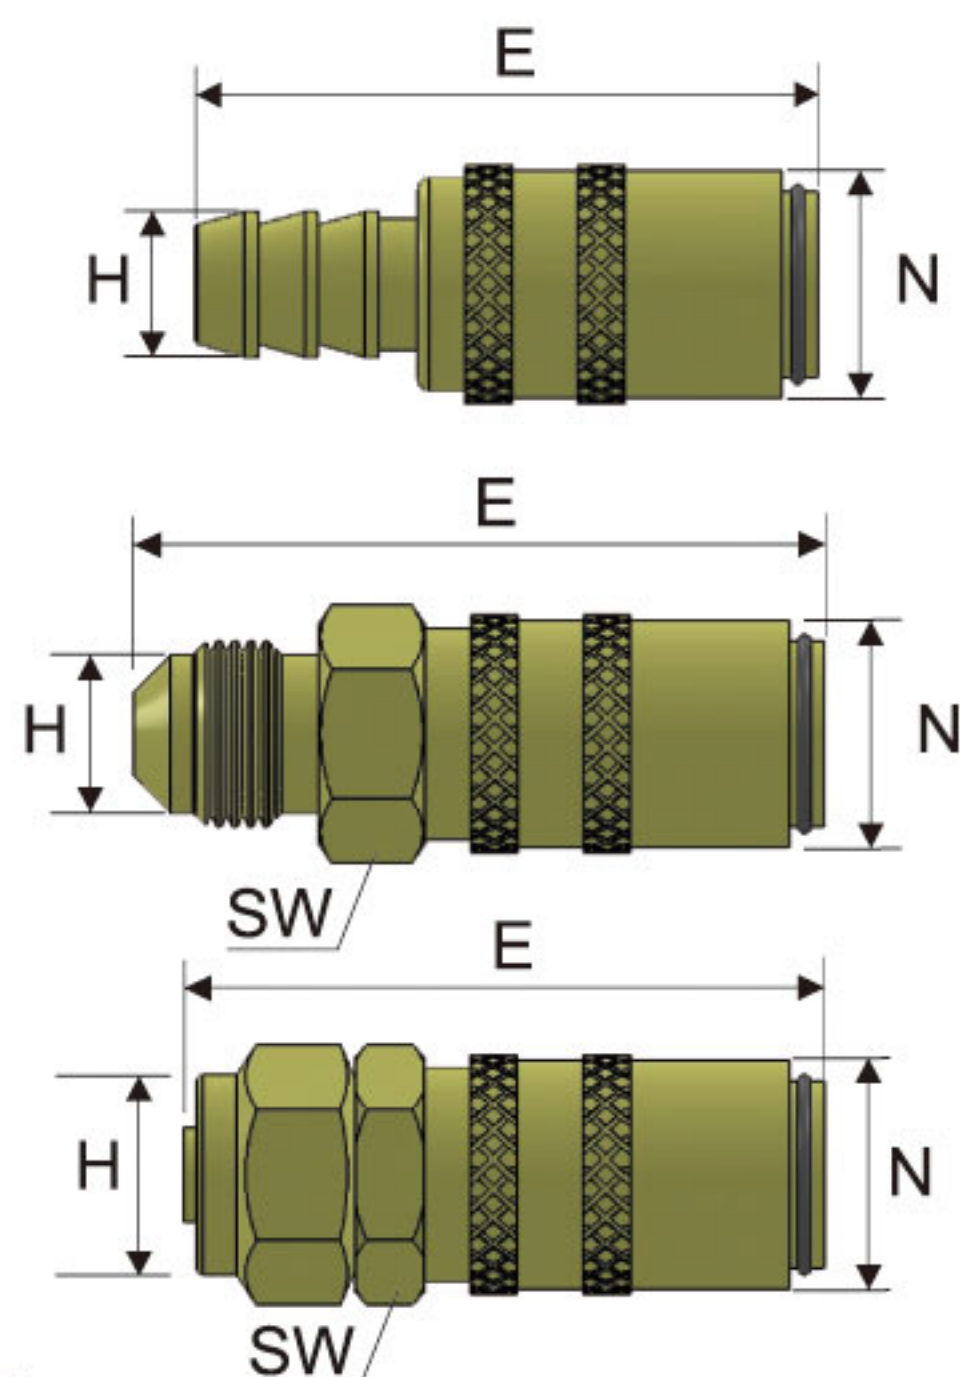

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
BK301-3	60.5	24	21H	3/8" 塑膠軟管 (Hose)	銅 BRASS
BK301-4	60.5			1/2" 塑膠軟管 (Hose)	
BK301-5	60.5			5/8" 塑膠軟管 (Hose)	
BK301-3TA	48			3/8"PT 內牙 (Female thread)	
BK301-3TB	52			3/8"PT 外牙 (Male thread)	
BK301-4TB	54			1/2"PT 外牙 (Male thread)	
BK301-M	57			3/8"x 1/2" PU 管 (PU tube)	
BK301-S2	57			φ 8 x φ 12 PU 管 (PU tube)	
BK301-L3	73			90° L 型 3/8" 塑膠軟管 (Hose)	
BK301-L4	73			90° L 型 1/2" 塑膠軟管 (Hose)	
BK301-L5	73			90° L 型 5/8" 塑膠軟管 (Hose)	
BK301-3H	55			3/8" (喇叭)白鐵紗管 9/16-18 37°flared	
BK301-4H	59			1/2" 喇叭口接頭 3/4-16 37°flared	
BK301-L3H	73			90° L 型 3/8" (喇叭) 9/16-18 37°flared	
BK301-L4H	73			90° L 型 1/2" (喇叭) 3/4-16 37°flared	
BK301-P1	75			外牙 + AX 插心	
BK301-P2	75			外牙 + AS 插心	
適用流體 Application	空氣、水、油 Gas 、 Water 、 Oil	工作壓力 Working Pressure Max. 10 kg/cm ²		工作溫度 Working Temp. 0~80℃ or 0~180℃	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : BK301-4-OH	

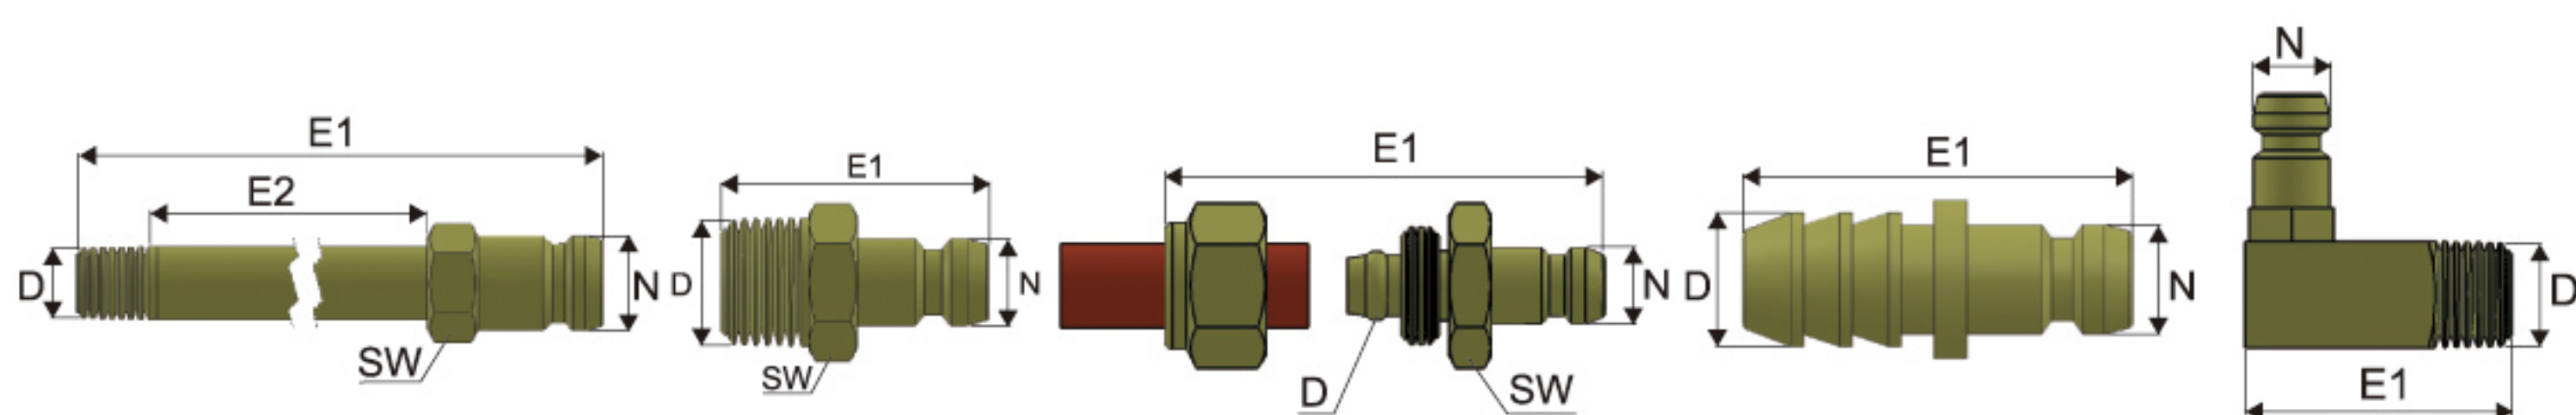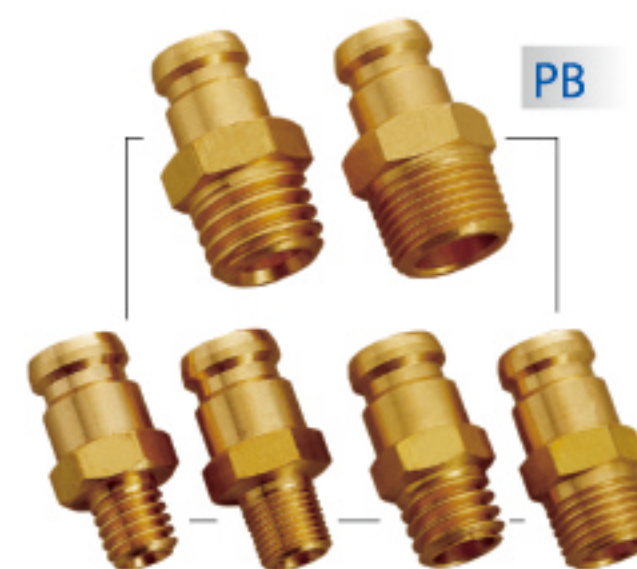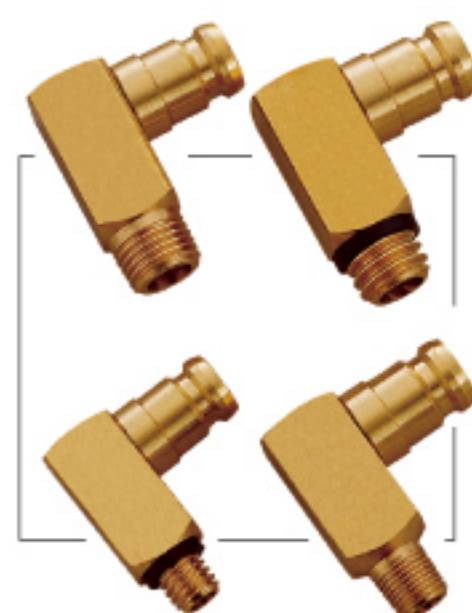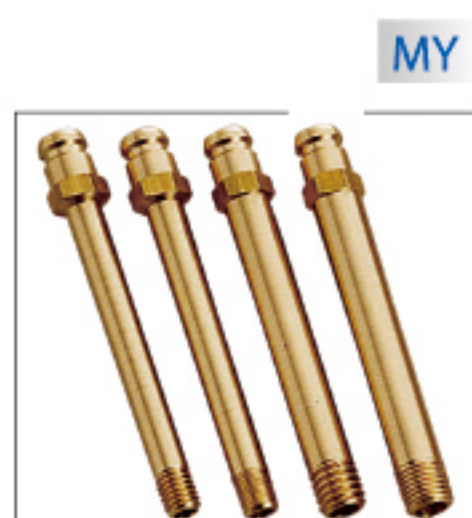

型號 ITEM NO.	E 1(長度) LENGTH (mm)	E 2(長度) LENGTH (mm)	D(管接尺寸) TUBE &THREAD	SW	材質 MATERIAL
MH	200	170	1/8"PT、W3/8 粗牙 1/4"PT、W1/2 粗牙	14H	銅 BRASS
ME	160	130			
MK	130	100			
MY	110	80			
MD	90	60			
MF	70	40			
MR	44.5	22			
PB	28		1/8"PT、W3/8 粗牙	14H	
	30.5		1/4"PT、W1/2 粗牙	17H	
			3/8"PT、W5/8 粗牙	21H	
			32	1/2"PT	
PL	38		1/8"PT、W3/8 粗牙	15□	
	35		1/4"PT、W1/2 粗牙	18□	
	37		3/8"PT	22□	
	38		1/2"PT		
PX	38		3/8"、1/2"、5/8" 塑膠軟管(HOSE)		
PS2	36		φ 8 x φ 12 PU 管 (PU tube)		
PM	36		3/8"x 1/2" PU 管 (PU tube)		
PLR	46.5		1/4"PT、3/8"PT		
★ PLR 為 90° L 型旋轉插心、其結構可 360° 旋轉。 ★ PLR is a 90° L rotated type plug , the structure is allowed to 360° rotation 。					N: φ 13.0



RK601-6




RK601-6TA



RK601-6H





RK601-6TB

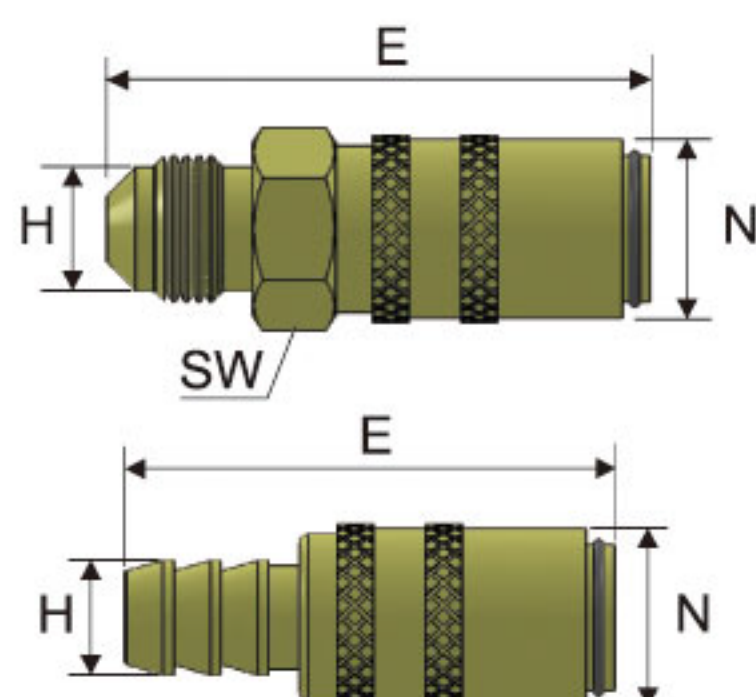


▲ 單閉式
Single shut-off

▲ 開放式
Non-valved



型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
RK601-6	89	34		3/4" 塑膠軟管 (Hose)	銅 BRASS
RK601-4TA	74.5		29H	1/2"PT 內牙 (Female thread)	
RK601-4TB	80.5			1/2"PT 外牙 (Male thread)	
RK601-6TA	76.5		30H	3/4PT 內牙 (Female thread)	
RK601-6TB	80.5		29H	3/4"PT 外牙 (Male thread)	
RK601-6H	82.5			3/4" 喇叭口接頭 1"-12 37°flared	
適用流體 Application	空氣、水、油 Gas、Water、Oil	工作壓力 Working Pressure Max. 10 kg/cm ²		工作溫度 Working Temp. 0~80℃ or 0~180℃	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : RK601-6-OH	

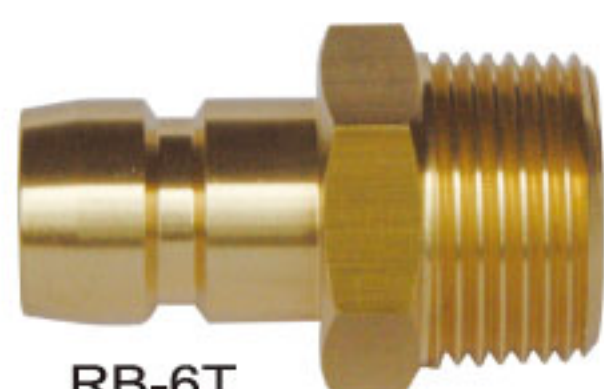

RB-6T

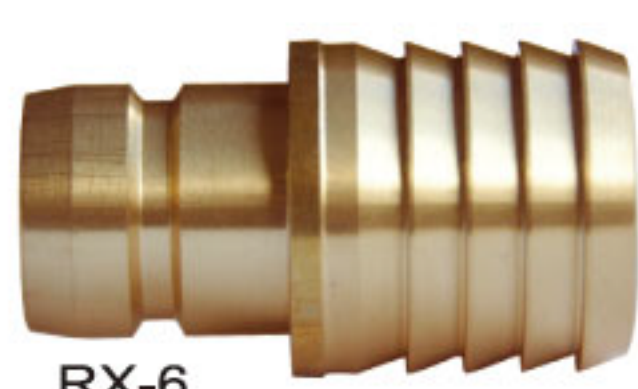


RX-6

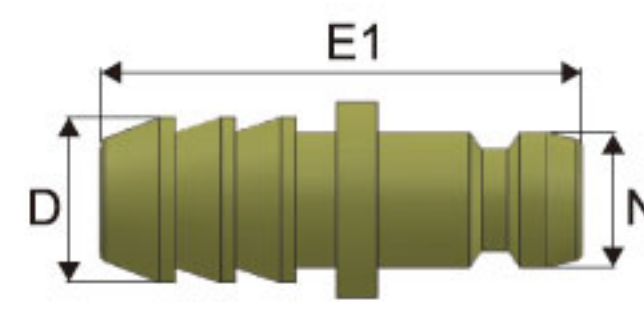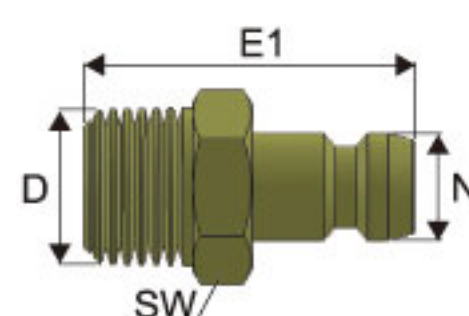

型號 ITEM NO.	E 1(長度) LENGTH (mm)	N (外徑) O.D. (mm)	D(管接尺寸) TUBE & THREAD	SW	材質 MATERIAL
RB-4T	48	19	1/2"PT	21H	銅 BRASS
RB-6T	48		3/4"PT	27H	
RX-6	52.5		3/4" 塑膠軟管(HOSE)		
RX-10	52.5		1" 塑膠軟管(HOSE)		



CK801-10

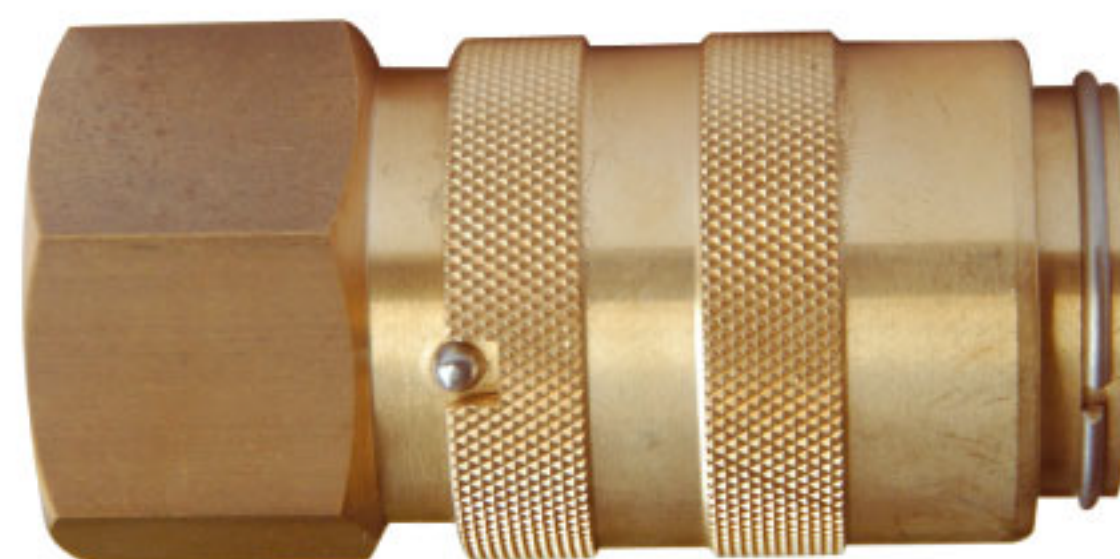


CK801-10TA



CK801-10H




CK801-10TB

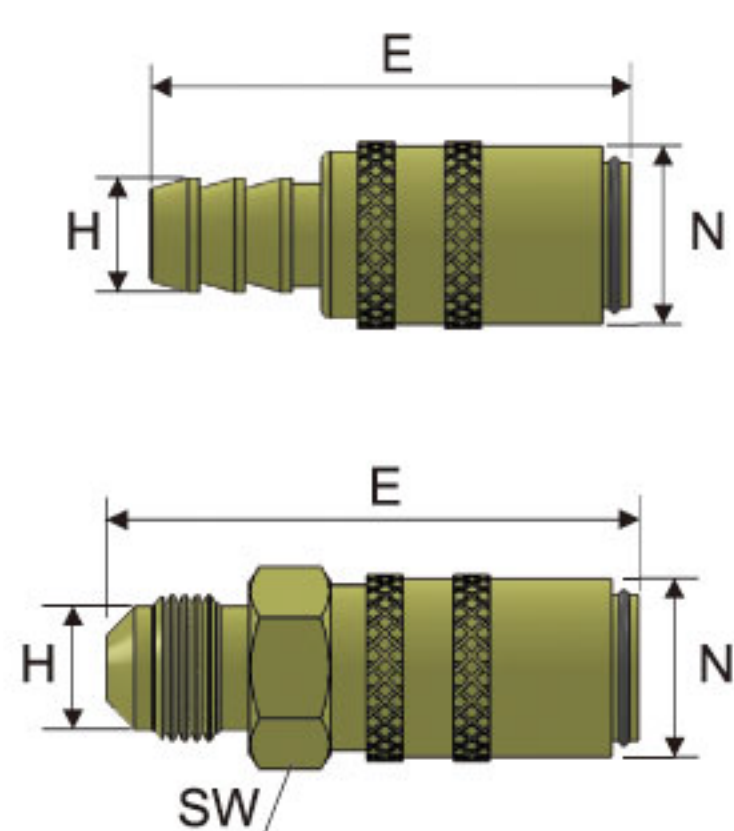單閉式
Single shut-off開放式
Non-valved

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
CK801-10	93	40		1" 塑膠軟管 (Hose)	銅 BRASS
CK801-12	93			1-1/4" 塑膠軟管 (Hose)	
CK801-6TA	81.5		35H	3/4"PT 內牙 (Female thread)	
CK801-6TB	86.5			3/4"PT 外牙 (Male thread)	
CK801-10TA	81.5		38H	1" PT 內牙 (Female thread)	
CK801-10TB	86.5		35H	1" PT 外牙 (male thread)	
CK801-10H	88.5			1" 喇叭口接頭 1-1/4"-12 37°flared	
適用流體 Application	空氣、水、油 Gas、Water、Oil	工作壓力 Working Pressure Max. 10 kg/cm ²		工作溫度 Working Temp. 0~80℃ or 0~180℃	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : CK801-10-OH	

CK801型快速接頭專用模具插心



MALE PLUG FOR CK801 TYPE

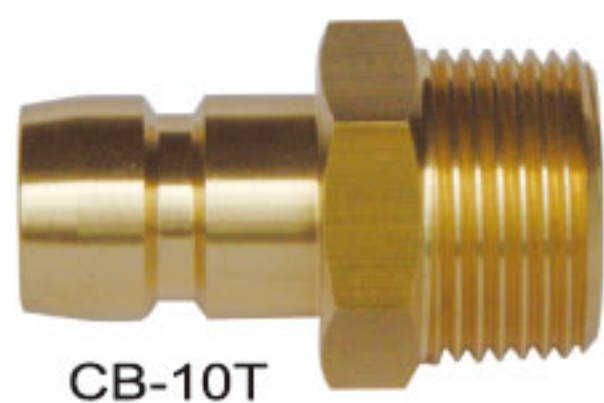

CB-10T




CX-10

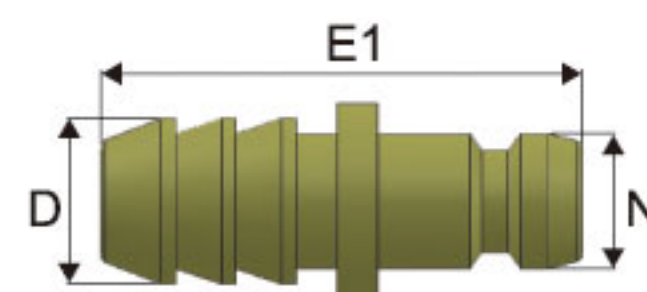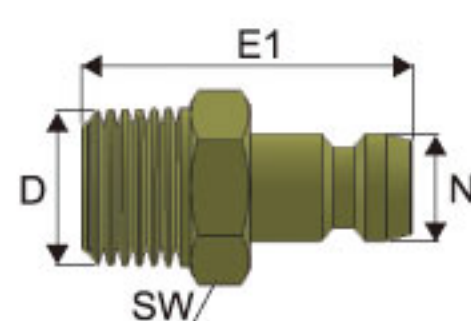



型號 ITEM NO.	E 1(長度) LENGTH (mm)	N (外徑) O.D. (mm)	D(管接尺寸) TUBE & THREAD	SW	材質 MATERIAL
CB-6T	49	25	3/4"PT	27H	銅 BRASS
CB-10T	51		1 "PT	35H	
CX-10	59		1" 塑膠軟管 (HOSE)		
CX-12	59		1-1/4" 塑膠軟管 (HOSE)		

NK401型快速接頭

NK401 TYPE QUICK COUPLER-SOCKET

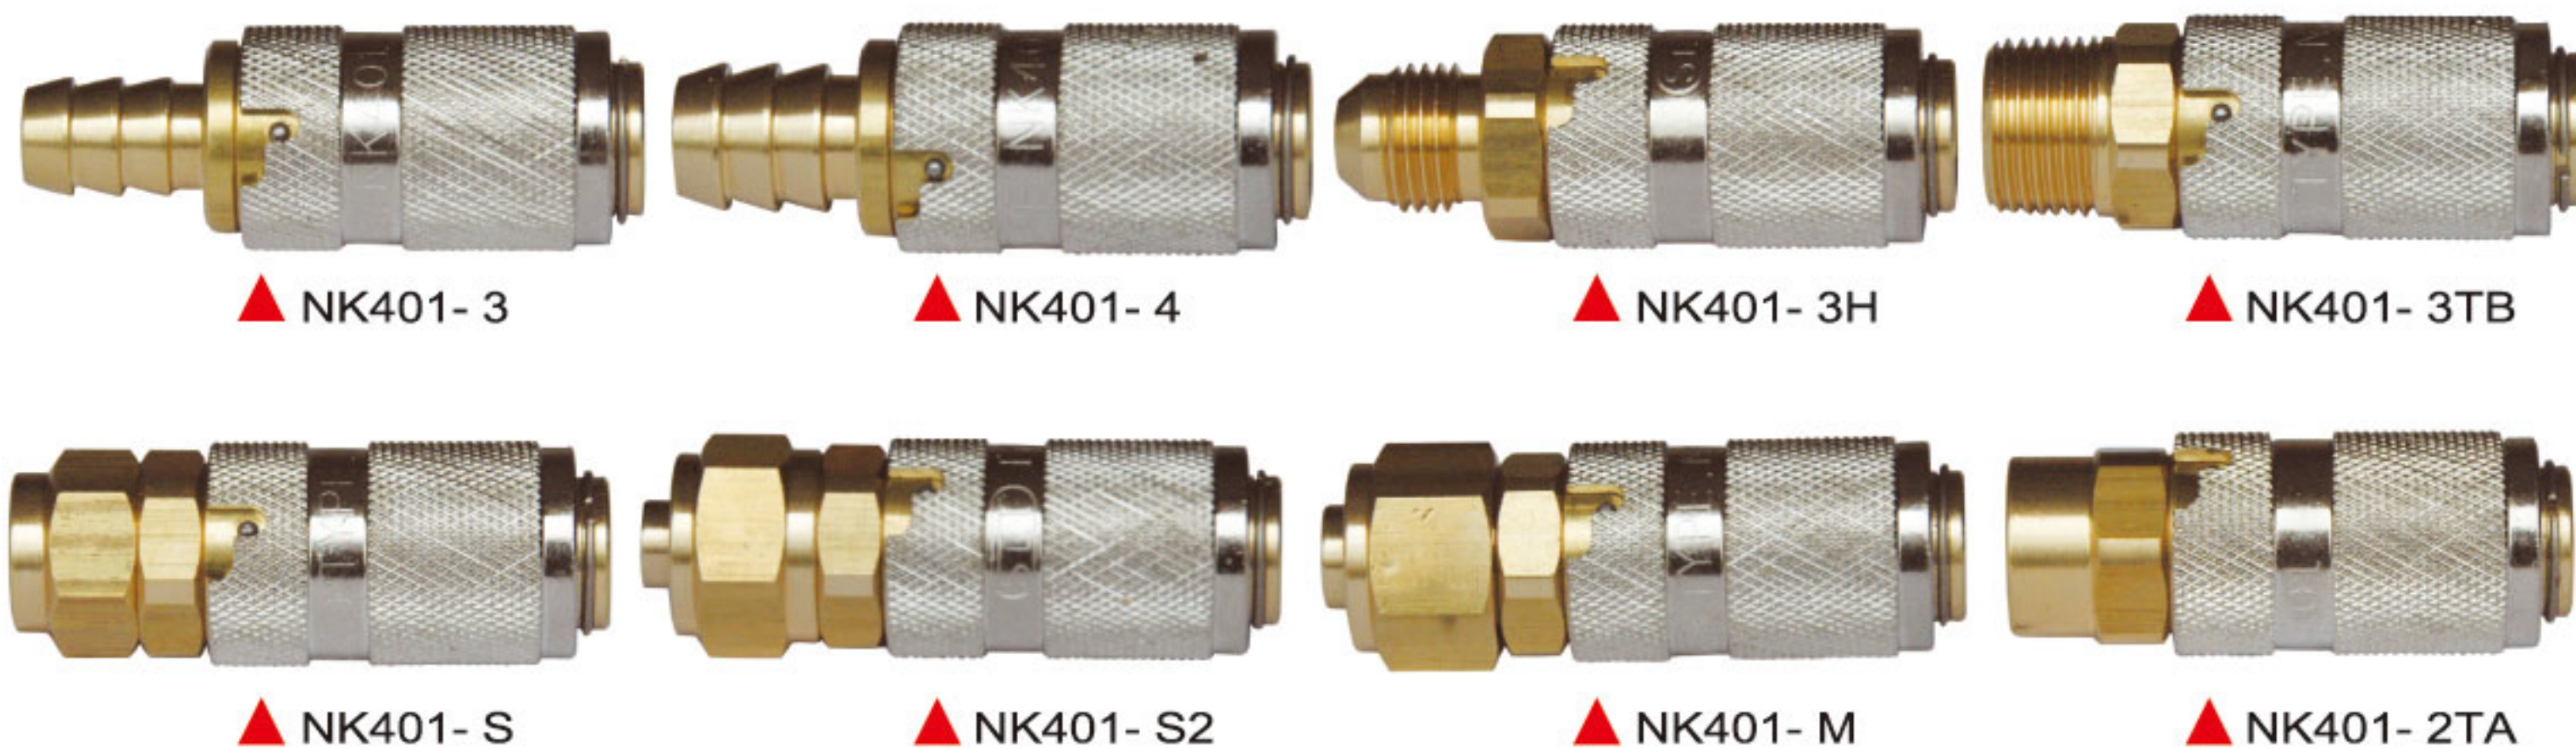

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
NK401-2	57.5	21	18H	5/16" 塑膠軟管 (Hose)	銅 BRASS
NK401-3	57.5			3/8" 塑膠軟管 (Hose)	
NK401-4	57.5			1/2" 塑膠軟管 (Hose)	
NK401-2TA	52.5			1/4"PT 內牙 (Female thread)	
NK401-2TB	55.5			1/4"PT 外牙 (Male thread)	
NK401-3TB	55.5			3/8"PT 外牙 (Male thread)	
NK401-S	55.5			φ 6.5 x φ 10 PU 管 (PU tube)	
NK401-S2	60.5			φ 8 x φ 12 PU 管 (PU tube)	
NK401-M	60.5			3/8"x 1/2" PU 管 (PU tube)	
NK401-2H	56			1/4" (喇叭)白鐵紗管 7/16-20 37°flared	
NK401-3H	57.5			3/8" (喇叭)白鐵紗管 9/16-18 37°flared	
適用流體 Application	空氣、水、油 Gas、Water、Oil			工作壓力 Working Pressure Max. 10 kg/cm²	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : NK401-S-OH	

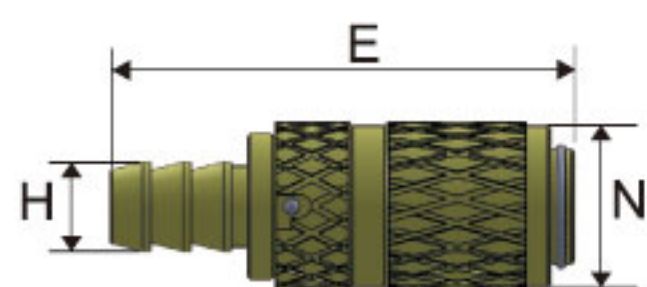


NK401型快速接頭專用模具插心

MALE PLUG FOR NK401 TYPE




全新自動上鎖快速接頭NK401型 & GK501型使用說明 Auto-lock QRC NK401 & GK501 instruction

- 接合時，請直接將插心推入快速接頭，其結構會將插心與快速頭自動上鎖，防止脫落。
CONNECTION: Please push plug into socket directly, the special design will lock plug and socket automatically.
- 分離時，請按步驟 1. 將外殼順時針旋轉至固定位置。
2. 往前推，即可分離。
DISCONNETION: 1. Please turn the sleeve clockwise.
2. Then push forward.

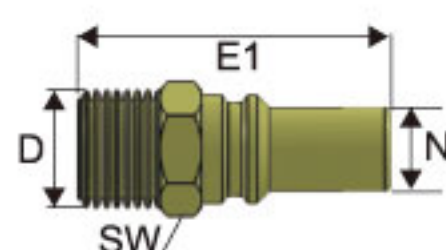


型號 ITEM NO.	E 1(長度) LENGTH (mm)	D(管接尺寸) TUBE &THREAD	SW	材質 MATERIAL
NB	38	1/8"PT	12H	銅 BRASS
	39	1/4"PT	14H	
	39	3/8"PT	17H	
NL	33	1/8"PT、1/4"PT	15□	
NX	42	5/16"、3/8"、1/2" 塑膠軟管(HOSE)	17H	
NS	39	φ 6.5 x φ 10 PU 管 (PU tube)		
NS2	44	φ 8 x φ 12 PU 管 (PU tube)		
NM	44	3/8"x 1/2" PU 管 (PU tube)	18□	
NLR	38.5	1/8"PT、1/4"PT、		
★ NLR 為 90° L 型旋轉插心、其結構可 360° 旋轉。 ★ NLR is a 90° L rotate type plug , the structure is allowed to 360° rotation 。				N : φ 8.0

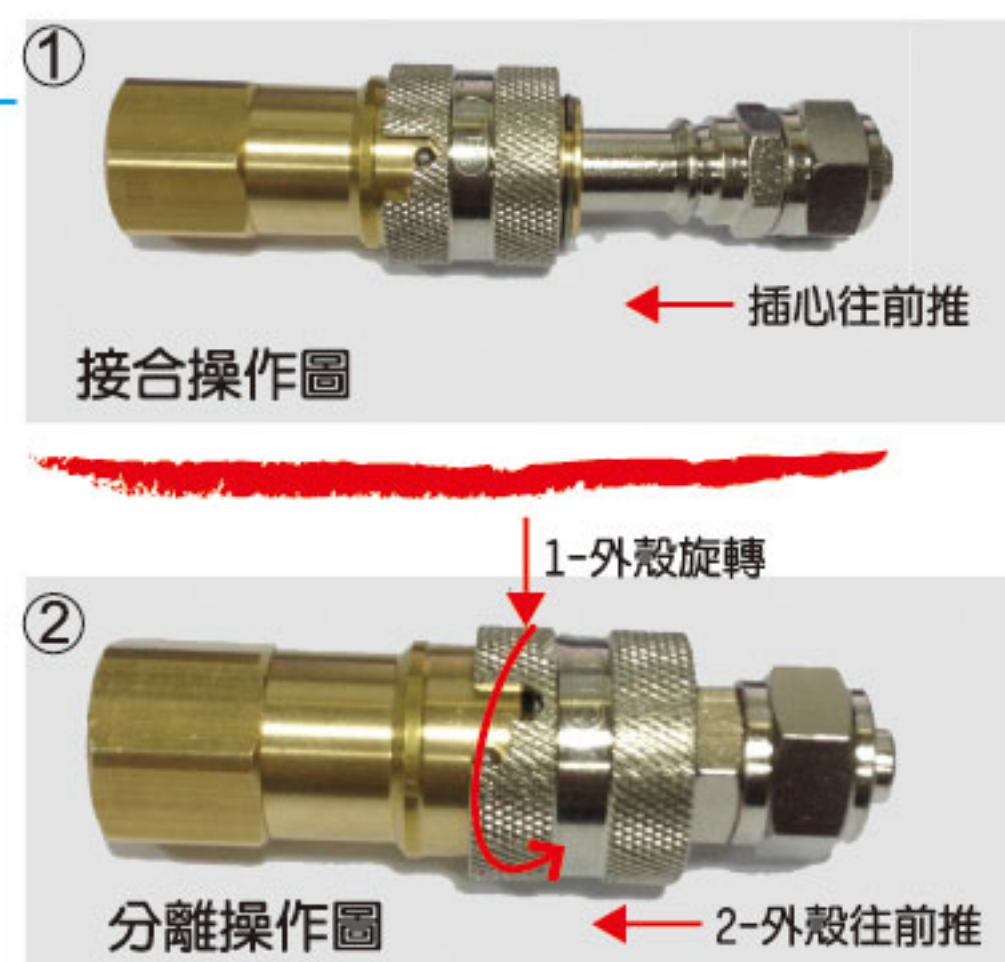

GK501型快速接頭

GK501 TYPE QUICK COUPLER-SOCKET

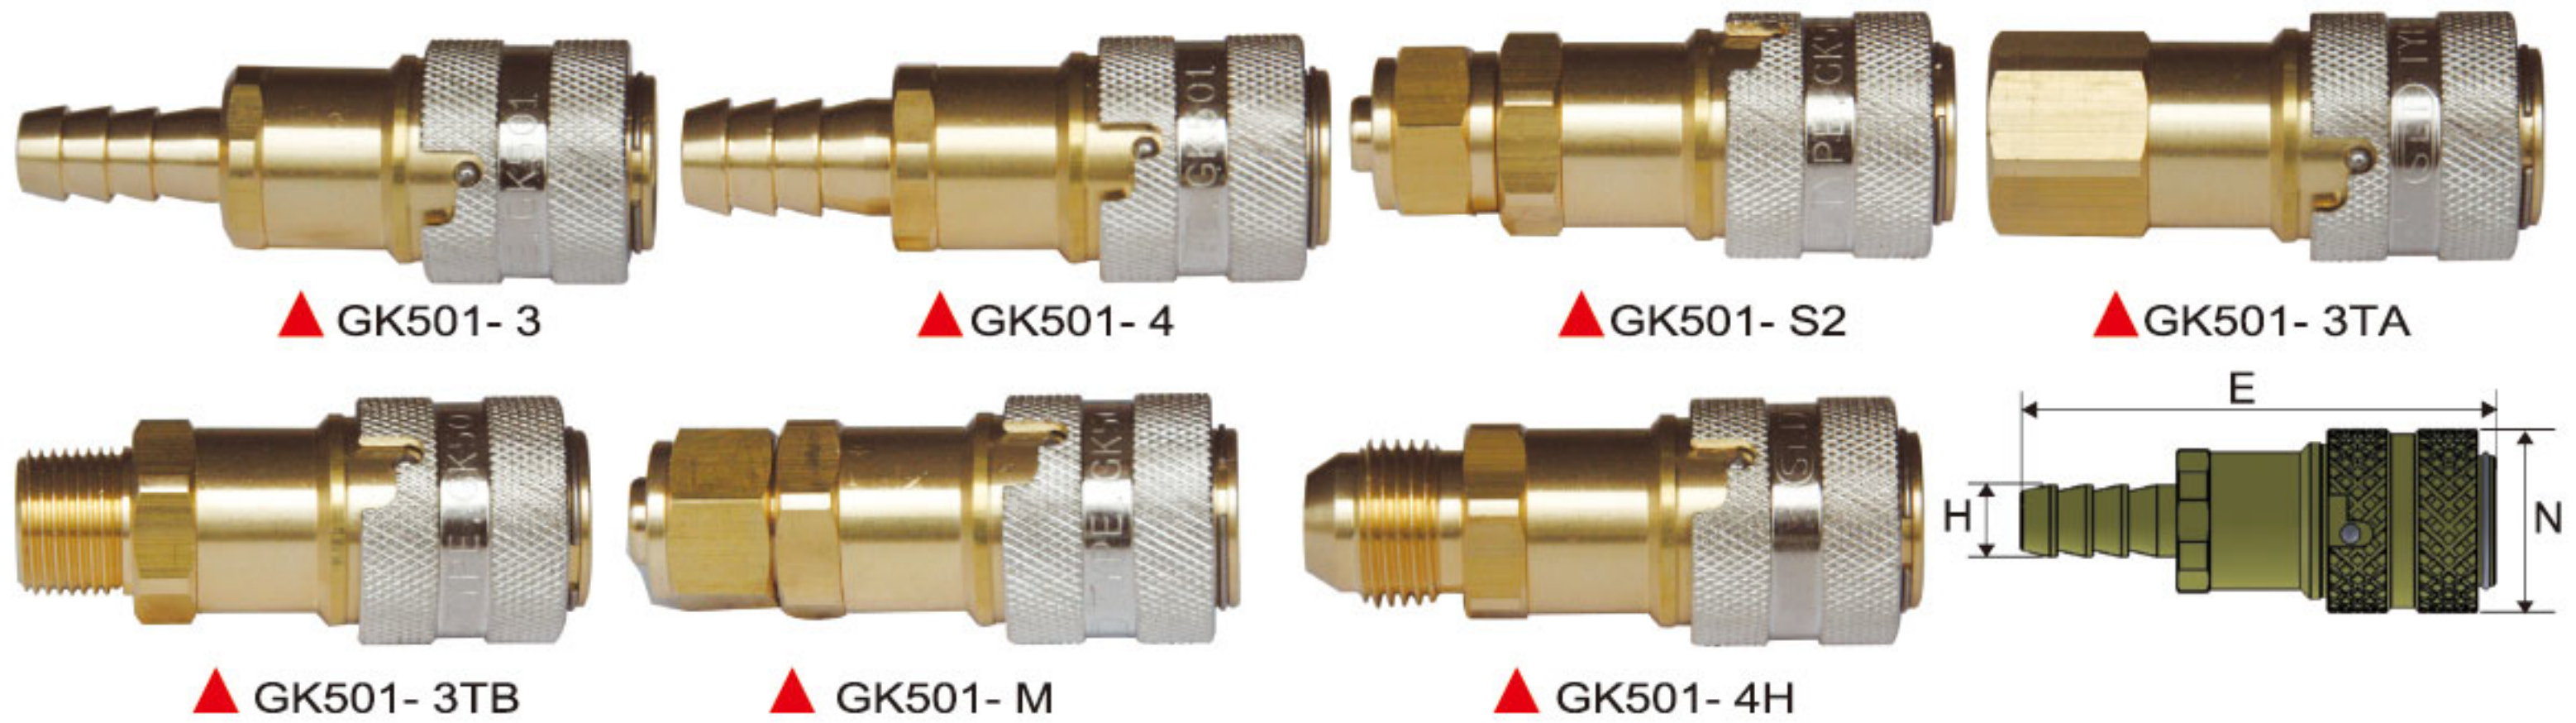

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
GK501-3	73	28	21H	3/8" 塑膠軟管 (Hose)	銅 BRASS
GK501-4	73			1/2" 塑膠軟管 (Hose)	
GK501-3TA	62			3/8"PT 內牙 (Female thread)	
GK501-3TB	64			3/8"PT 外牙 (Male thread)	
GK501-S2	68			φ 8 x φ 12 PU 管 (PU tube)	
GK501-M	68			3/8"x 1/2" PU 管 (PU tube)	
GK501-3H	65			3/8" (喇叭)白鐵紗管 9/16-18 37°flared	
GK501-4H	69			1/2" (喇叭)白鐵紗管 3/4-16UNF 37°flared	
適用流體 Application	空氣、水、油 Gas 、 Water 、 Oil	工作壓力 Working Pressure Max. 10 kg/cm ²		工作溫度 Working Temp. 0~80℃ or 0~180℃	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : GK501-M-OH	



GK501型快速接頭專用模具插心

MALE PLUG FOR GK501 TYPE




全新自動上鎖快速接頭NK401型 & GK501型使用說明 Auto-lock QRC NK401 & GK501 instruction

- ① 接合時，請直接將插心推入快速接頭，其結構會將插心與快速頭自動上鎖，防止脫落。
CONNECTION: Please push plug into socket directly, the special design will lock plug and socket automatically.
- ② 分離時，請按步驟 1. 將外殼順時針旋轉至固定位置。
2. 往前推，即可分離。
DISCONNECTION: 1. Please turn the sleeve clockwise.
2. Then push forward.

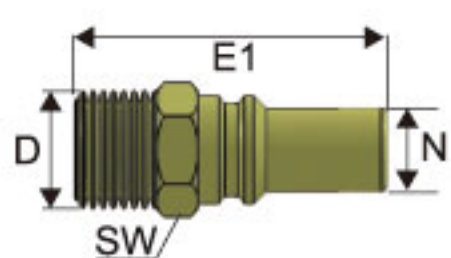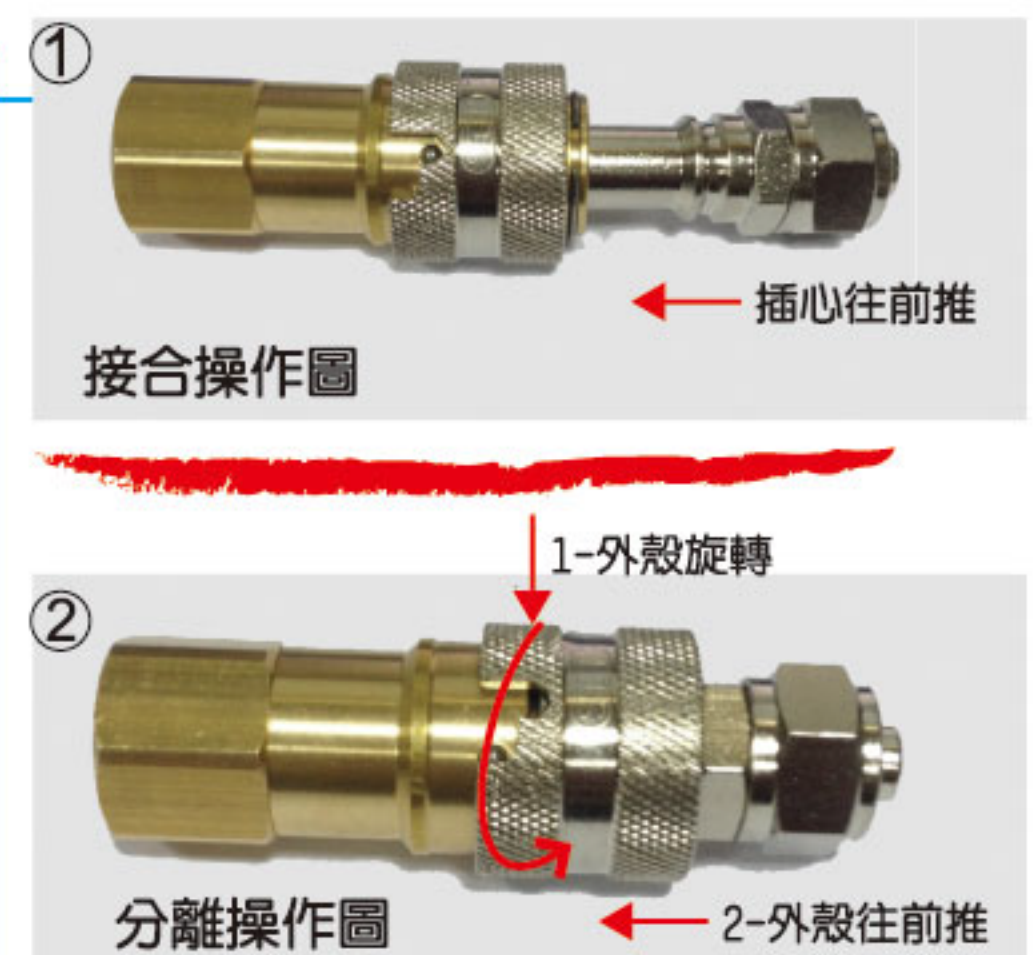


型號 ITEM NO.	E 1(長度) LENGTH (mm)	D(管接尺寸) TUBE &THREAD	SW	材質 MATERIAL
GB	45	1/4"PT	16H	銅 BRASS
	45	3/8"PT	17H	
	47	1/2"PT	21H	
GL	37	1/4"PT、3/8"PT	18□	
	38	1/2"PT	22□	
GX	51.5	3/8"、1/2" 塑膠軟管(HOSE)		
GS2	50	φ 8 x φ 12 PU 管 (PU tube)	17H	
GM	50	3/8"x 1/2" PU 管 (PU tube)		
GLR	46.5	1/4"PT、3/8"PT	22□	
★ GLR 為 90° L 型旋轉插心、其結構可 360° 旋轉。 ★ GLR is a 90° L rotate type plug , the structure is allowed to 360° rotation 。				N : φ 12.0

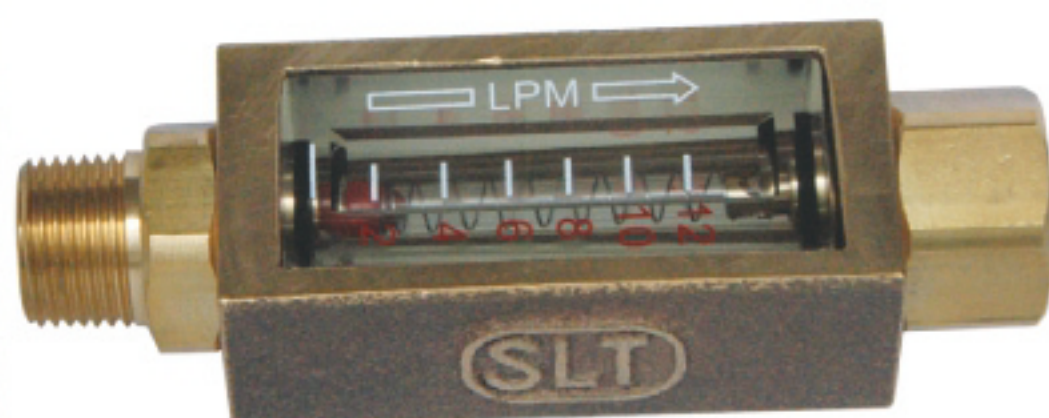

SE-01

ST-02 内外牙(附溫度錶)

ST-02 Male & Female Thread
(Thermometer Attached) ▼

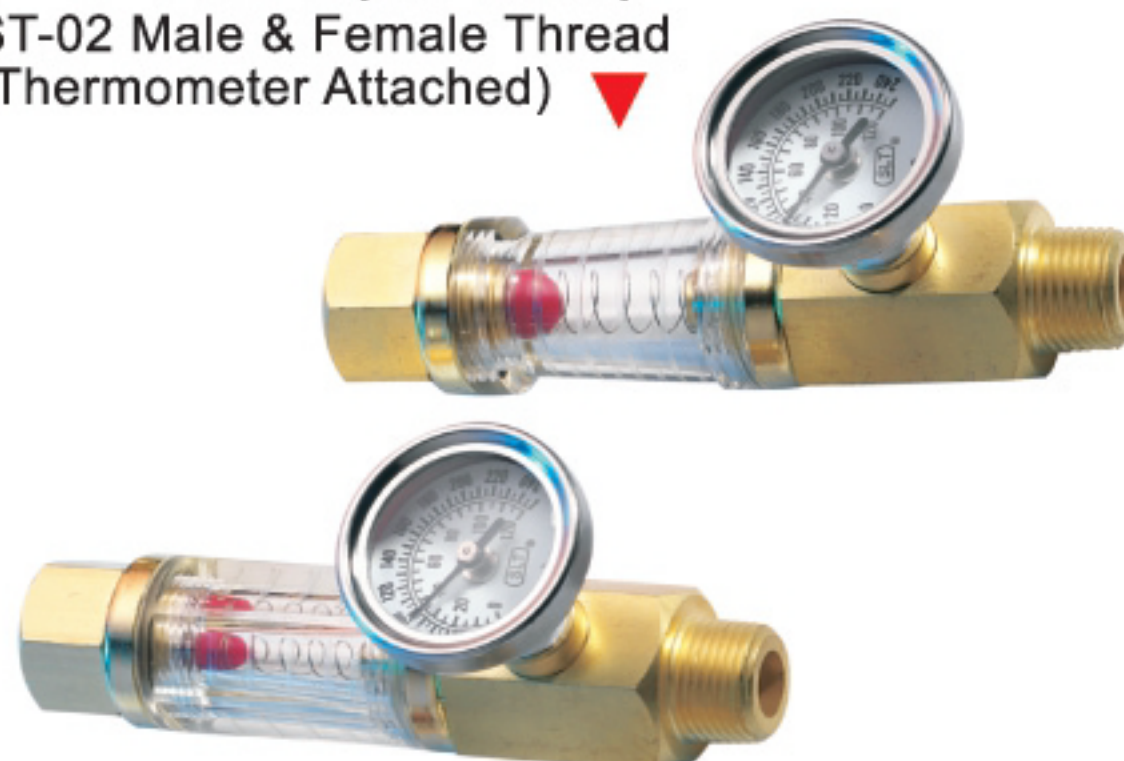

▲ SK-02 内外牙(附溫度錶)

SK-02 Male & Female Thread
(Thermometer Attached)

▼ ST-01TBL 雙內牙(附螺母)




▼ ST-01TB 内外牙



▼ ST-01TA 雙內牙


ST-01TA Double Female Thread

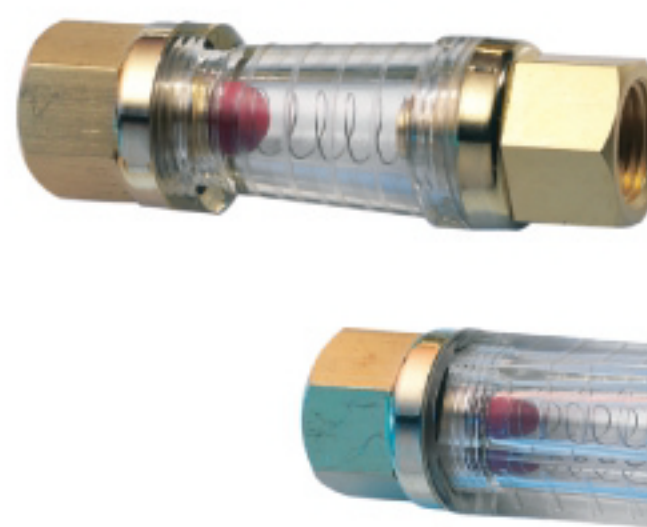

▲ SK-01TBL 雙內牙(附螺母)




▲ SK-01TB 内外牙

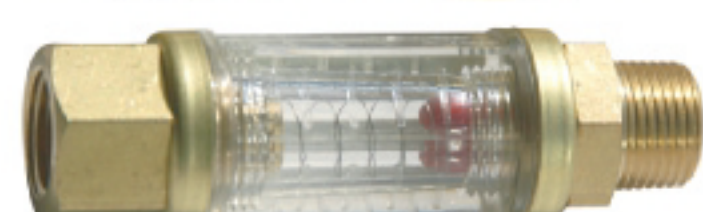

▲ SK-01TA 雙內牙

SK-01TA Double Female Thread

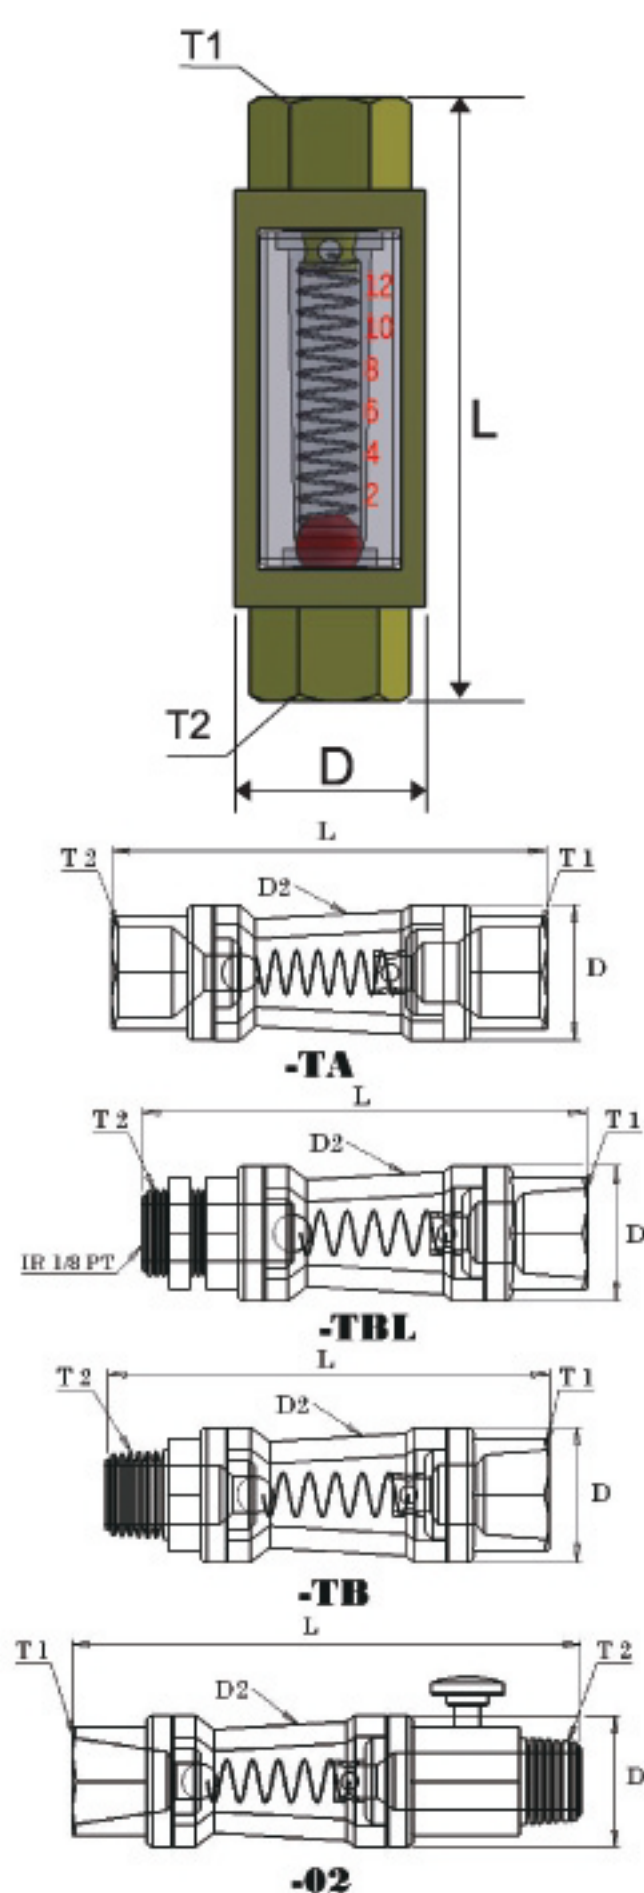

型號 ITEM NO.	L (mm)	D (mm)	T1	T2	D2
ST-01TA	81	25.3	1/4 、3/8PT 內牙(F)	1/4 、3/8PT 內牙(F)	圓型 (ROUND)
ST-01TB	85		1/4 、3/8PT 內牙(F)	1/4 、3/8PT 外牙(M)	
ST-01TB2	85		1/4 、3/8PT 外牙(M)	1/4 、3/8PT 內牙(F)	
ST-01TBL	90		1/8PT 內牙(F)	M16 外牙(M)	
ST-02	110		3/8PT 內牙(F)	3/8PT 外牙(M)	附溫度錶 T
SK-01TA	81		1/4 、3/8PT 內牙(F)	1/4 、3/8PT 內牙(F)	六角型 (HEXAGON)
SK-01TB	85		1/4 、3/8PT 內牙(F)	1/4 、3/8PT 外牙(M)	
SK-01TB2	85		1/4 、3/8PT 外牙(M)	1/4 、3/8PT 內牙(F)	
SK-01TBL	90		1/8PT 內牙(F)	M16 外牙(M)	
SK-02	110		3/8PT 內牙(F)	3/8PT 外牙(M)	附溫度錶 T
SE-01TA	90	30	1/4 、3/8PT 內牙(F)	1/4 、3/8PT 內牙(F)	
SE-01TB	95		1/4 、3/8PT 內牙(F)	1/4 、3/8PT 外牙(M)	
SE-01TB2	95		1/4 、3/8PT 外牙(M)	1/4 、3/8PT 內牙(F)	
工作壓力(Pressure) : Max 10 kg/cm ² 溫度(Temp.) : 0 – 80° C (水溫 Water) 0 –120° C (油溫 Oil) 流量 (Flow rate) : Max 12 L / min					
備註 : F = FEMALE THREAD , M = MALE THREAD , T= THERMOMETER					


ST-04TBC 內外牙附錶 ▼
1/2"PT~1"PT

Male and Female Thread (Thermometer attached)




ST-04TAC 雙內牙附錶 ▼
1/2"PT~1"PT


Double Female Thread (Thermometer attached)

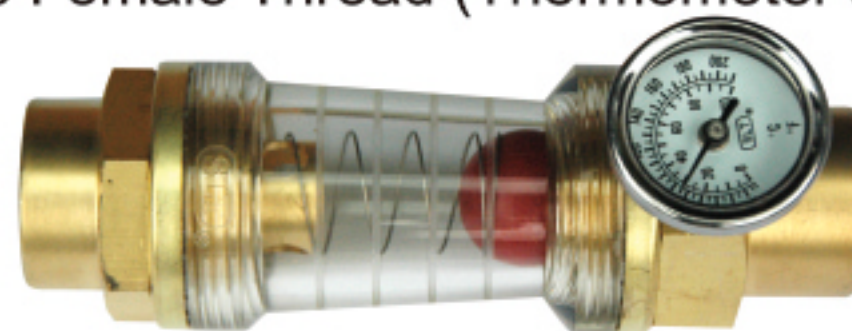

ST-04TB 內外牙 ▼
1/2"PT~1"PT Male and Female Thread

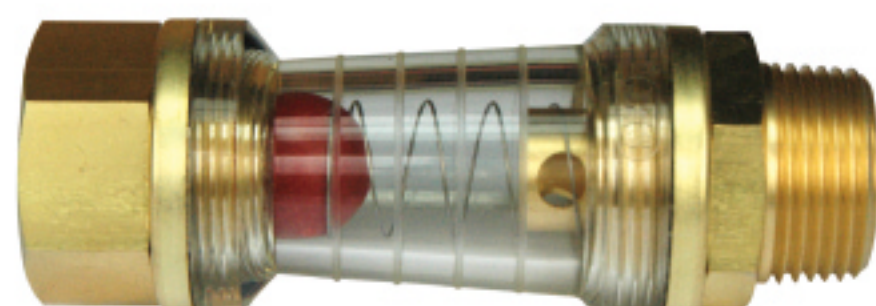

ST-04TA 雙內牙 ▼
1/2"PT ~ 1"PT Double Female Thread

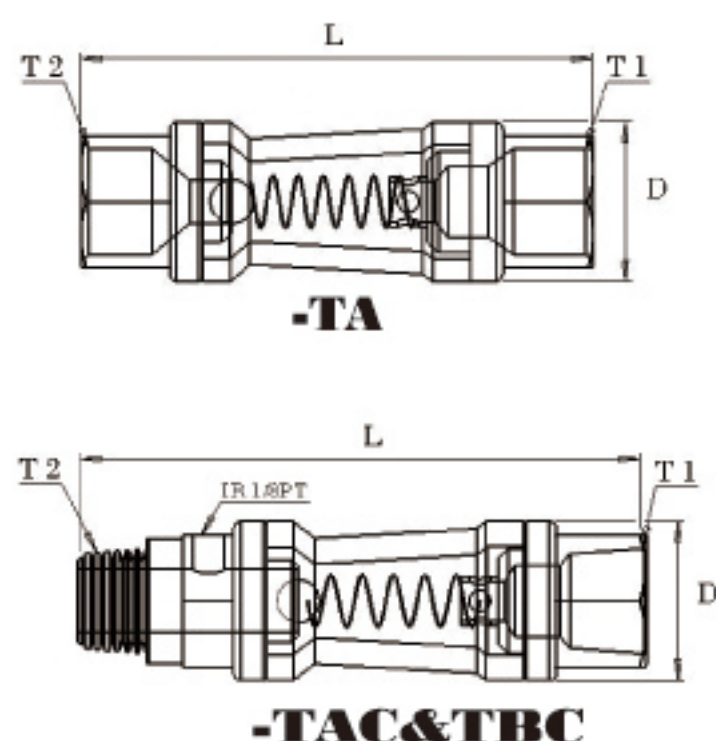

型號 ITEM NO.	L (mm)	D (mm)	T1	T2
ST-0404TA	124	45	1/2PT 內牙(F)	1/2PT 內牙(F)
ST-0406TA	124		3/4PT 內牙(F)	3/4PT 內牙(F)
ST-0410TA	124		1" PT 內牙(F)	1" PT 內牙(F)
ST-0404TB	128		1/2PT 外牙(M)	1/2PT 內牙(F)
ST-0406TB	128		3/4PT 外牙(M)	3/4PT 內牙(F)
ST-0410TB	128		1" PT 外牙(M)	1" PT 內牙(F)
ST-0404TAC	138		1/2PT 內牙(F)	1/2PT 內牙(F) (附溫度表T)
ST-0406TAC	138		3/4PT 內牙(F)	3/4PT 內牙(F) (附溫度表T)
ST-0410TAC	138		1" PT 內牙(F)	1" PT 內牙(F) (附溫度表T)
ST-0404TBC	159		1/2PT 內牙(F)	1/2PT 外牙(M) (附溫度表 T)
ST-0406TBC	159		3/4PT 內牙(F)	3/4PT 外牙(M) (附溫度表 T)
ST-0410TBC	159		1" PT 內牙(F)	1" PT 外牙(M) (附溫度表 T)
工作壓力(Pressure) : Max 10 kg/cm ² 溫度(Temp.) : 0 – 80° C (水溫 Water) 0 – 120° C (油溫 Oil) 流量 (Flow rate) : Max 67 L / min				
備註 : F = FEMALE THREAD , M = MALE THREAD , T= THERMOMETER				

雙閉式鋼製油壓快速接頭

(DOUBLE SHUT-OFF HYDRAULIC QUICK COUPLER)



ISO-A 歐規 (鐵)
1/4" ~ 1/2"



ISO-B 日規 (銅,白鐵)
1/4" ~ 1/2"

此規格可接受訂製耐溫300°C或特殊流體專用
ISO-B is available to customize for
Max 300°C or special fluid



特製ISO-A歐規 (鐵)
HK503 & 503HB - 3/8"

不必拆卸原有的傳統街頭，直接套入然後旋緊即可使用，省時省力。